




	Premium Model DH.0.DEH	Model SG.0.DTS	
Beschikbare modellen / Available models	0.125 - 5 ton / 400V	0.25 - 15 ton / 400V	
Hijssnelheid / Lifting speed	0.250 ton	8/2 m/min	7/2.3 m/min
	0.500 ton	8/2 m/min	7.6/2.5 m/min
	1.000 ton	8/2 m/min	5/1.7 m/min
	2.000 ton	4/1 m/min	2.5/0.85 m/min
	3.000 ton	6/1.5 m/min	6/2 m/min
	5.000 ton	3/0.75 m/min	3/1 m/min
Netto gewicht / Net weight	0.250 ton	22 kg	50 kg
	0.500 ton	33 kg	51 kg
	1.000 ton	53 kg	57 kg
	2.000 ton	58 kg	64 kg
	3.000 ton	100 kg	116 kg
	5.000 ton	121 kg	130 kg

Vergelijking van behuizing afmetingen /
Comparison of body dimensions

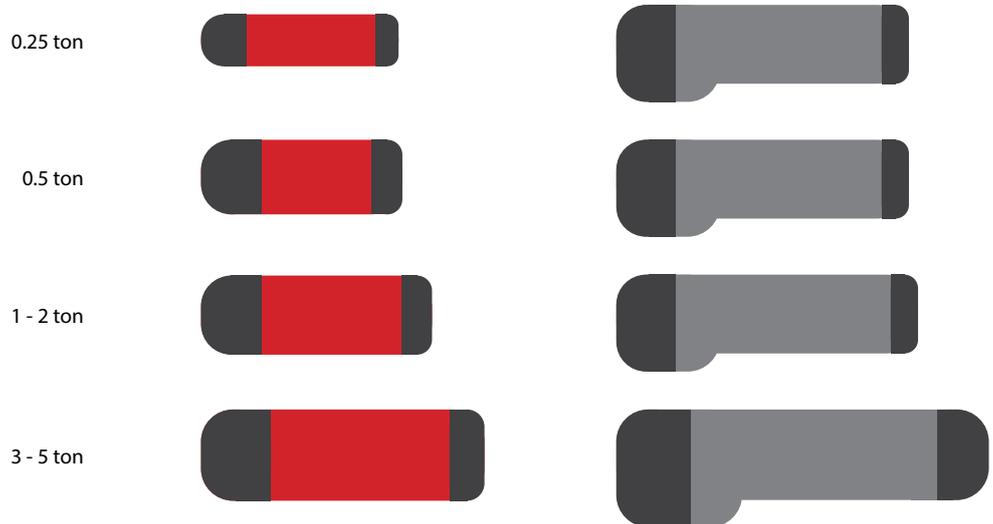

Behuizing bescherming / Housing protection		IP 55
Classificatie / Classification		M5/2m
Inschakelduur / Duty cycle	3 ton	40%
Stuurspanning / Control voltage		24 V
Overlastbeveiliging / Overload protection		Slipkoppeling / Slip clutch
Eindschakelaar / Limit switch		Hoogste en laagste microscharelaar / Upper and lower micro switch
Thermische bescherming / Thermal protection		Warmtesensor / Heat sensor
Hijsketting / Load chain		
Besturingssysteem / Control system		SIEMENS / EATON